






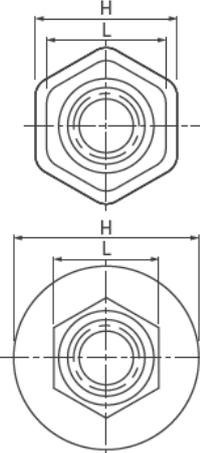
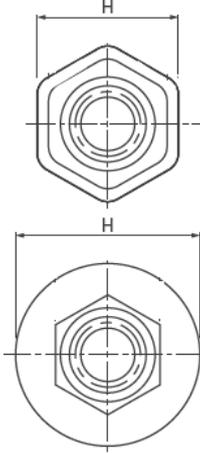








### ■カタログ誤記訂正箇所一覧

掲載項	訂正箇所		誤(訂正前)	正(訂正後)
P4	製品図面(全長(L)の範囲)		全長(L)は頭高(P)を含む	全長(L)は頭高(P)を含まない
				
	頭形状マーク		平皿頭	皿頭
				
		六角平皿頭	六角皿頭	
				
P26	適正板厚 t	P2064	3.7~4.4	4.4~5.2
		P2642	2.1~3.0	2.0~3.0
		P3545	2.2~3.1	2.1~3.0
		P3555	3.2~4.1	3.0~4.0
		P3570	4.7~5.6	4.5~5.5
		P3580	5.7~6.6	5.5~6.5
		P6080	4.0~5.5	3.5~5.5
P27	製品図面(全長(L)の範囲)		全長(L)は頭高(P)を含む	全長(L)は頭高(P)を含まない
				

掲載項	訂正箇所		誤(訂正前)	正(訂正後)
P27	取付可能板厚 t	DS-1060	4.6~6.0	4.0~6.0
		DS-1240	1.6~4.0	2.5~4.0
P29	ナット径 D	KS-825-SLD	9.0	11.0
		KS-840-SLD		
		KS-1025-SLD KS-1040-SLD	11.0	13.0
	頭径 H	KS-825-SLD	10.0	12.0
		KS-840-SLD		
		KS-1025-SLD KS-1040-SLD	12.0	14.0
	KA-425-SLD	9.0	7.0	
P30	頭形状マーク		六角平皿頭 	六角皿頭 
	製品図面		内径の六角対辺(L) 	誤記のため削除 
	製品図面(全長(L)の範囲) ※下側の六角平頭の図		全長(L)は頭高(P)を含む 	全長(L)は頭高(P)を含まない 

掲載項	訂正箇所	誤(訂正前)	正(訂正後)
P31	頭形状マーク	平皿頭 	皿頭 
	製品図面(ナット径(D)の範囲) ※左側の皿頭の図		ナット径(D)の範囲を修正 
	製品図面(全長(L)・ナット径(D)の範囲) ※右側の平頭の図	全長(L)は頭高(P)を含む 	・全長(L)は頭高(P)を含まない ・ナット径(D)の範囲を修正 
	全長 L	KS-325-RLT	9.3
			9.5